



**AQUAPURE**  
SALT CHLORINATOR



Jandy®

# CREATE A SALTWATER OASIS



**AQUAPURE®**  
SALT CHLORINATOR

TRADE SERIES  
**EXCLUSIVE**

# The Heavy-Duty Standard for Maximum Performance

AquaPure® Salt Chlorinators use salt water to deliver high-performance water sanitation with uncompromised performance, reliability, and hydraulic efficiency.


- **Robust Features**
  - › Automatic self-cleaning feature, which ensures consistent operation and extends the life of the cell
  - › Professional-grade, ruthenium coated titanium electrodes for long-term reliability
  - › Exclusive Tri-Sensor technology — reliable electronic water flow detection to ensure maximum performance, even at very low flow rates (to take advantage of the benefits of VS pumps)
  - › Digital salinity read-out for accurate salt level indication
  - › Flow, temperature, and status readings provide instant feedback on the current operation
- **Easy Integration**
  - › Seamless communication with AquaLink® Control systems, enabling easy monitoring of salt levels and convenient, precise sanitizer output settings
  - › When combined with PureLink™ power centers, AquaLink and AquaPure work together for the ultimate in pool sanitizing and remote operation convenience

## SPECIFICATIONS

Model	PLC700	PLC1400 (PLC1400C in Canada)
Pool Size*	Up to 12,000 Gal (45,425 L)	Up to 40,000 Gal (151,416 L)
Input	120 VAC, 50/60 Hz, 1.5 AMPS	120 VAC, 50/60 Hz, 2.5 AMPS
	240 VAC, 50/60 Hz, 0.75 AMPS	240 VAC, 50/60 Hz, 1.25 AMPS
Output	22-30 VDC @ 3 AMPS maximum	22-30 VDC @ 6 AMPS maximum
Chlorine	0.625 lb./24 Hr. (283 gm/24 Hr.)	1.25 lb./24 Hr. (567 gm/24 Hr.)
Recommended Flow Rate	20-120 GPM	20-120 GPM

\*Pool sizes are generalizations and may vary with environmental conditions. Pools with greater exposure to sunlight may require greater chlorine production capacity.

## HEAD LOSS CHART

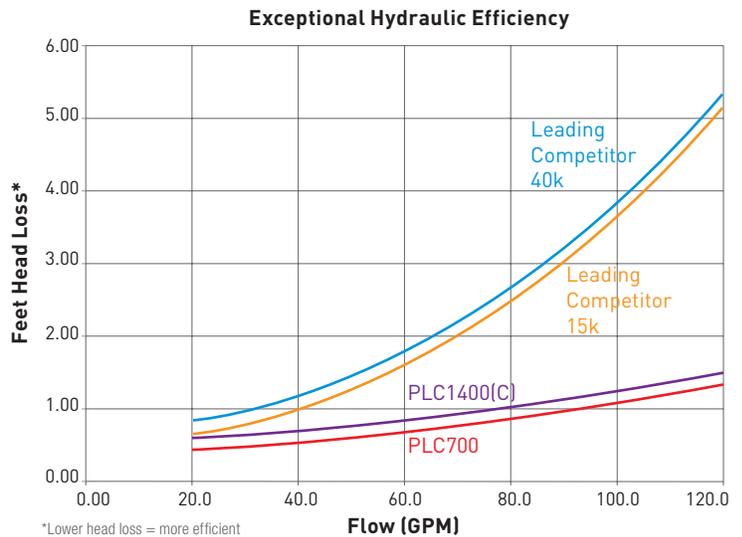


Jandy® 2" x 2½" universal unions

Ruthenium coated titanium electrodes for long-term reliability

Exclusive tri-sensor technology

Heavy-duty construction

Installs horizontally or vertically, in-line or as a 90° elbow

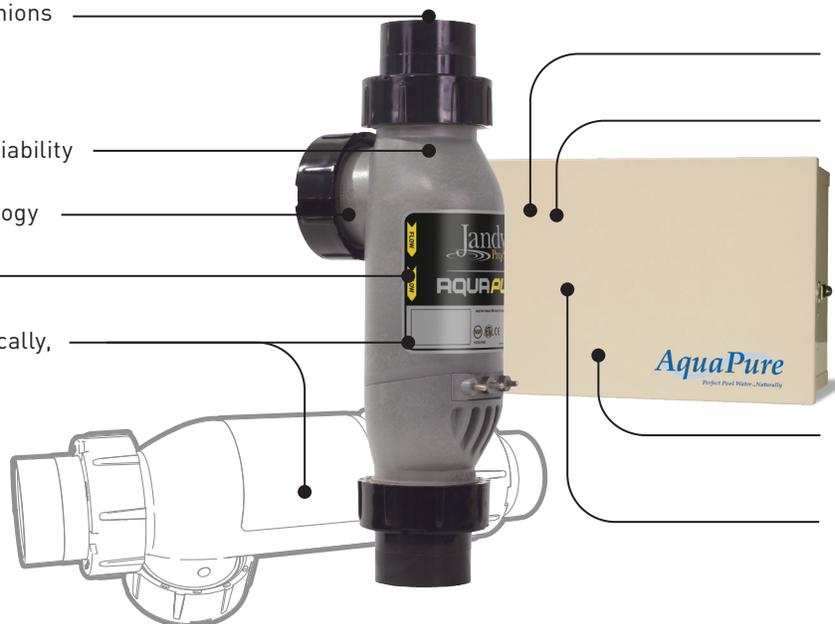

Digital salinity reading

Flow, temperature and status readings

Heavy-duty, powder-coated steel enclosure

Easily integrates with AquaLink and iAquaLink® Automation Systems

A Fluidra Brand | Jandy.com | 1.800.822.7933

©2024 Fluidra. All rights reserved. The trademarks and trade names used herein are the property of their respective owners. 74377\_SL



74377\_SL